

ARTEMIS 2 W Wet

WET RATED RECESSED WALL WASHING LED DOWNLIGHT



Artemis 2 W Wet - Wet Rated Recessed Wall Washing Downlight. Artemis 2 W Wet features Senso-designed reflectors and a wide range of color temperatures in a high performance yet efficient and compact package. As part of the Artemis family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

Ordering Code

| | | | | | | | | | |
|---------|-------------|-------------|-----------|------------|---|-----------|-----------|---|---|
| Fixture | AR2W | WR | | 615 | | | | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| Driver | | AR2W | WR | | | -- | -- | | |
| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | | |

Product Specifications

SAMPLE: Fixture **AR2W - WR - A90 - 615 - 25 - 07 - DL - 02 - 08** | Driver **910 - AR2W - WR - STD - 120 - A90 - 07 - 08**

| 1 - Model | 2 - Trim | 3 - LED | 4 - Optic | 5 - CCT | 6 - Lumen | 7 - Accessory | 8 - Trim Color |
|-----------------------------------|-----------------------|-----------------------|---|--|--|----------------------------|--|
| AR2W · Artemis 2 Wall Wash | WR · Wet Rated | A90 · Accuracy | Artemis 2 W is equipped with a fixed beam spread. For other optics please contact Senso. | 25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K | 07 · 700 (7.7W) 10 · 1000 (10.9W) 15 · 1500 (16.8W) 20 · 2000 (25.7W) | DL · Diffusing Lens | 01 · White 02 · Black 08 · Silver XX · Custom |

| 9 - Baffle Color | 1 - Housing Style | 2 - Model | 3 - Trim | 4 - Driver | Dim Level | Dim Level |
|--|--|-----------------|-----------------|---|---------------------------------|---|
| 01 · White 02 · Black 08 · Silver XX · Custom | 915 · New Construction 920 · IC Housing*1 | Same as Fixture | Same as Fixture | STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase*2/3 ELDOLC · EldoLED 0 - 10 Volt DALI · Dali Protocol | N/A 1% 1% 0.1% 0.1% | LUTES · Hilume Ecodigital 1% LUT2W · 2 Wire for phase*3 1% LUT5S · 5 Series Eco System 5% DMX · Senso*4 EMG · Emergency Driver*4/5 |

| 5 - Voltage | 6 - LED | 7 - Lumen | |
|---|-----------------|-----------------|--|
| 120 · 120V 277 · 277V 347 · 347V | Same as Fixture | Same as Fixture | *1 Cannot exceed 1500lm *2 Not available in 700lm *3 Not available in 277V *4 Remote mounted *5 Specified separately |

Project : _____
Quantity : _____
Type : _____
Notes : _____

ARTEMIS 2 w Wet

WET RATED RECESSED WALL WASHING LED DOWNLIGHT



Light Engine

- Output:** up to 2000lm
- High Efficacy:** up to 150 lumen/Watt
- Color Options (CCT):** 2500K, 2700K, 3000K, 3500K, 4000K or 6500K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI & 50+ R9 Value

Driver

- Dimming:** 1% dimming standard with 0.1% option
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
- Installation:** Small Footprint allows retrofit installations


Installation

- For new and retrofit installations
- Simple connection between fixture and driver via quick connect
- Easy installation with spring loaded tabs
- 18° tilt angle

Construction / Finish

- Satin powder coated finish
- Custom finishes are available
- Cast Aluminum Trim
- Made in Canada

Dimension

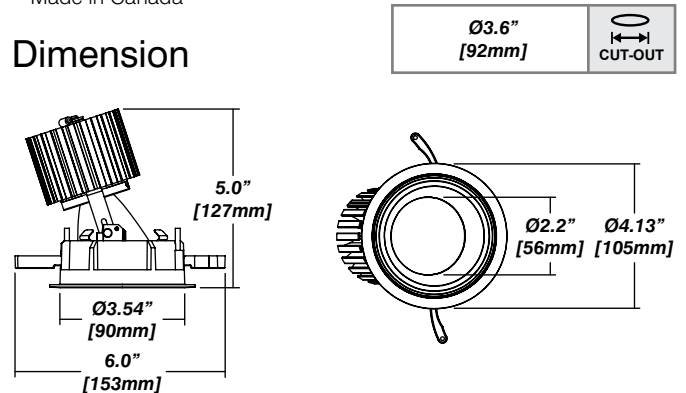


ARTEMIS 2 w Wet

WET RATED RECESSED WALL WASHING LED DOWNLIGHT




Housing Options

New Construction - 915

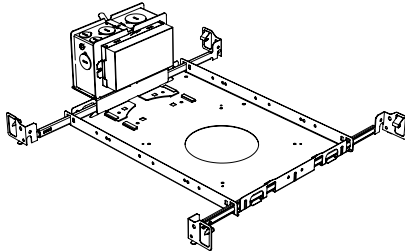


Dimension

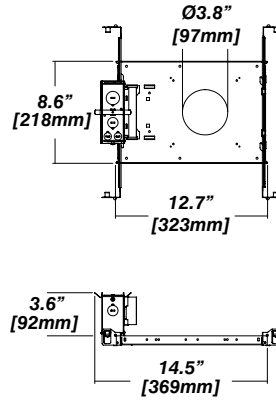


Included

- Plaster Frame** • Galvanized steel construction with cut-out
- Bar hanger** • Length: from 14-3/16" to 26"
- Outlet Box** • Outlet Box Included

IC Housing - 920

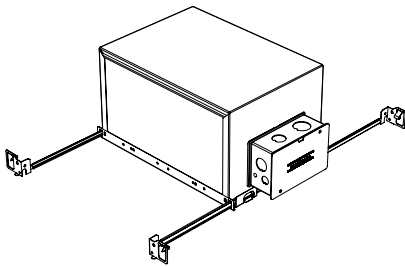

Dimension

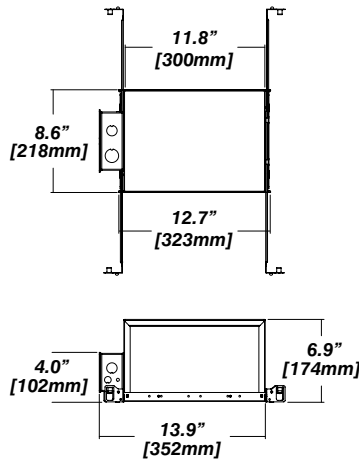

Included

- IC Housing** • Galvanized steel construction
- Airtight
- Includes gasketed junction box
- Plaster Frame** • Galvanized steel construction
- Bar hanger** • Length: from 14-3/16" to 26"

Note: use only with LED modules up to 1500lm