LineLED 24V - Installation Instructions

Models LL60X2 WET-T

Please read all instructions prior to installation and keep for future reference!

- 1. PRODUCT SHOULD BE INSTALLED BY A QUALIFIED ELECTRICIAN
- 2. ENSURE POWER IS OFF AT FUSE BOX PRIOR TO INSTALLTION TO PREVENT ELECTRICAL SHOCK.
- 3. USE ONLY WITH CLASS 2 POWER UNIT

- 4. SUITABLE FOR DAMP LOCATIONS
- 5. FOR UNDER CABINET OR SHELF MOUNT
- **6.** CONFORMS TO UL STD 2108. CERTIFIED TO CSA STD C22.2 NO.250.0.




REVO.3 07182023

1/1



7777 Merrimac Ave Niles, IL 60714 T 224.333.6033 F 224.757.7557 info@luminii.com www.luminii.com

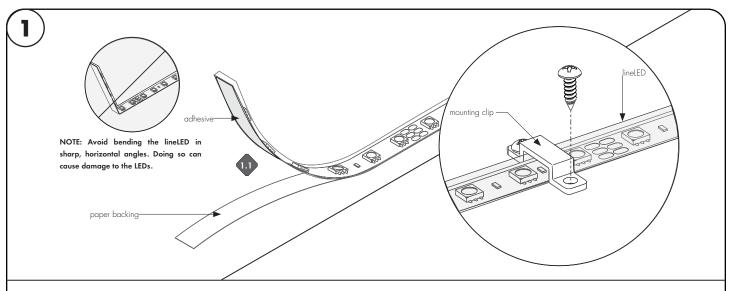

- 1.1 Clean the area thoroughly where the lineLED will be installed. Remove the paper backing from the lineLED and firmly press down making sure there are no air bubbles that can cause surface irregularities. Do not remove the adhesive, removing the adhesive may cause arcing of the lineLED tape.
- 1.2 If necessary, add a mounting clip every 12" for additional support.

