

Stenos Trackhead Modules - Installation Instructions

Models 1L, 1S

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN
2. USE ONLY WITH CLASS 2 POWER UNIT
3. 24 VOLTS DC
4. SUITABLE FOR DRY LOCATIONS ONLY
5. USE ONLY WITH LUMINII STENOS TRACK SYSTEM




REV 0.2
06282023

1 / 3

STENOS[®]
by luminii

7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

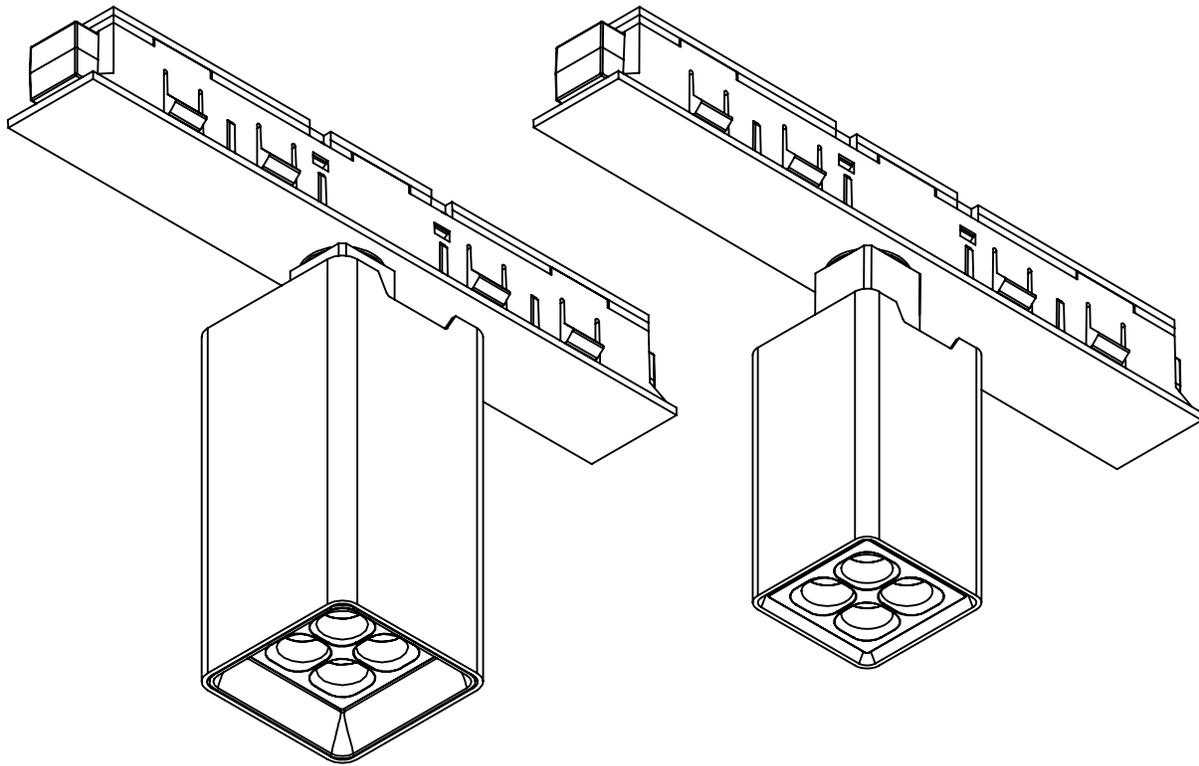

Stenos Track Head 1L

Stenos Track Head 1S

Stenos Trackhead Modules - Installation Instructions

Models 1L, 1S



STENOS[®]
by luminii



7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Please read all instructions prior to installation and keep for future reference!


1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN
2. USE ONLY WITH CLASS 2 POWER UNIT
3. 24 VOLTS DC
4. SUITABLE FOR DRY LOCATIONS ONLY
5. USE ONLY WITH LUMINII STENOS TRACK SYSTEM

REV 0.2
06282023

2 / 3

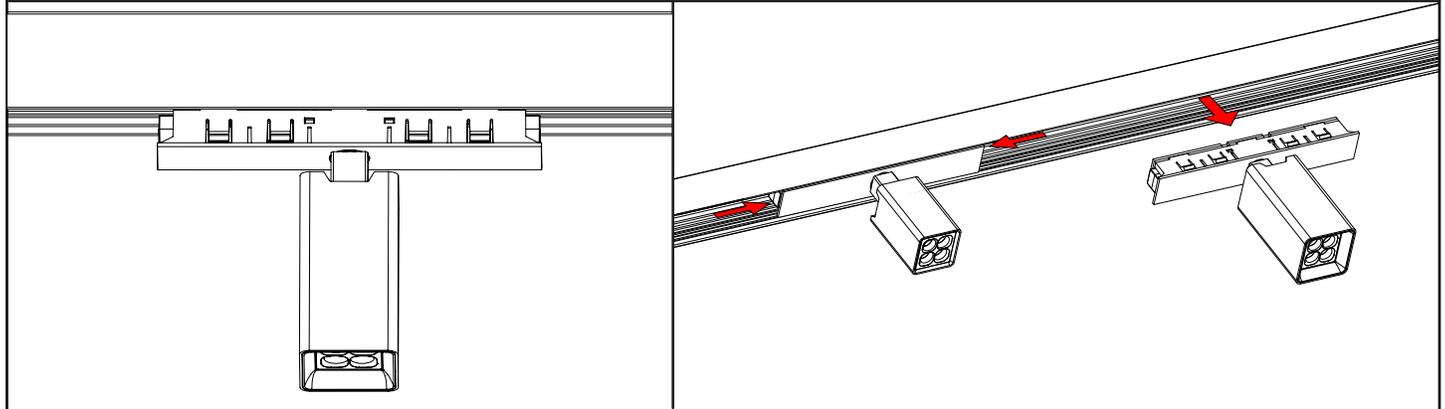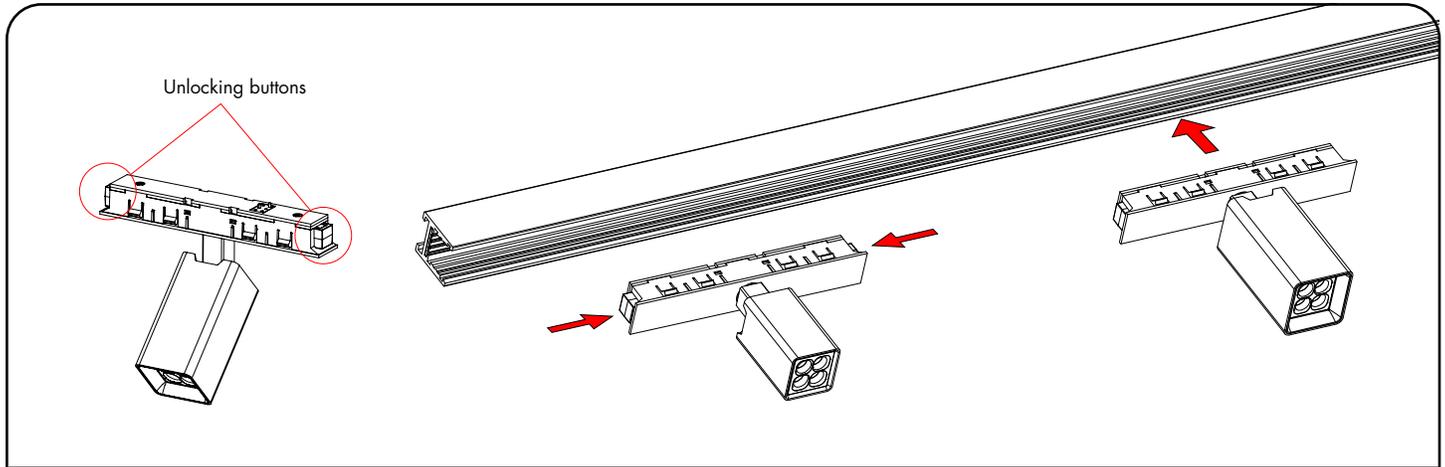

- Carefully align and then snap the module track adapter into the Stenos track housing. Be sure the unlocking buttons on each side are depressed, or fixture will not snap into place. If necessary, adapter can be snapped in one end at a time to more easily actuate unlock buttons.
- To remove modules from track housing, depress each unlocking button before pulling down on each side of track adapter. Ensure track is powered off prior to removal.

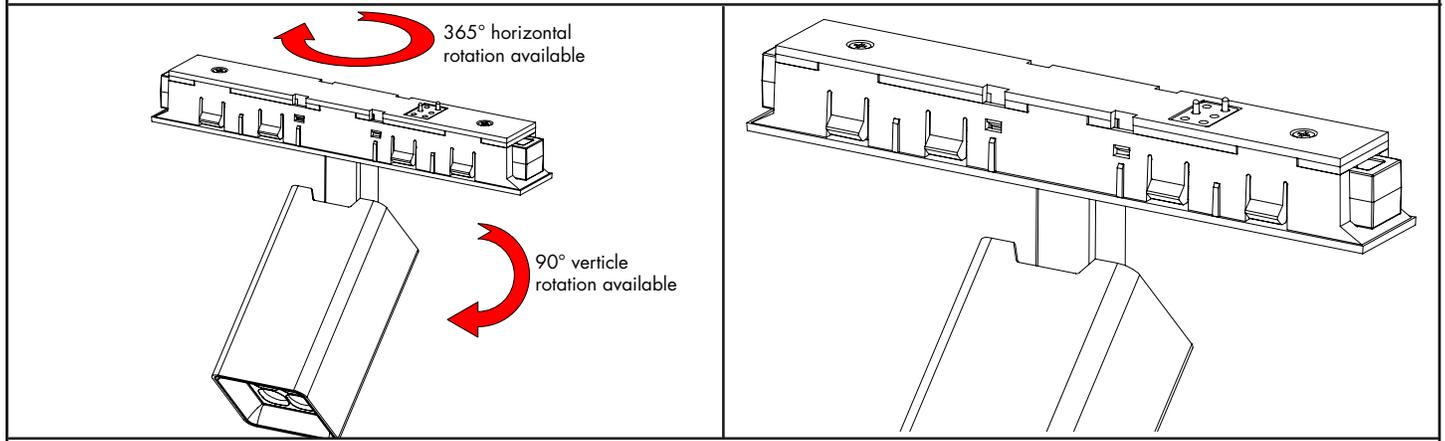

- The track heads can be aimed up and down up to 90°, or rotated up to 365°. Track head should freely rotate – do not force the track head to rotate past its hard stops.
- The track adapter has asymmetric electrical contact pins that allow for 2-channel installations within the Luminii Stenos track system. To switch which channel the track adapter engages with, remove the track adapter, rotate 180°, and reinstall.

Stenos Trackhead Modules - Installation Instructions

Models 1L, 1S

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN
2. USE ONLY WITH CLASS 2 POWER UNIT
3. 24 VOLTS DC
4. SUITABLE FOR DRY LOCATIONS ONLY
5. USE ONLY WITH LUMINII STENOS TRACK SYSTEM





REV 0.2
06282023

3 / 3

STENOS[®]
by luminii

7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

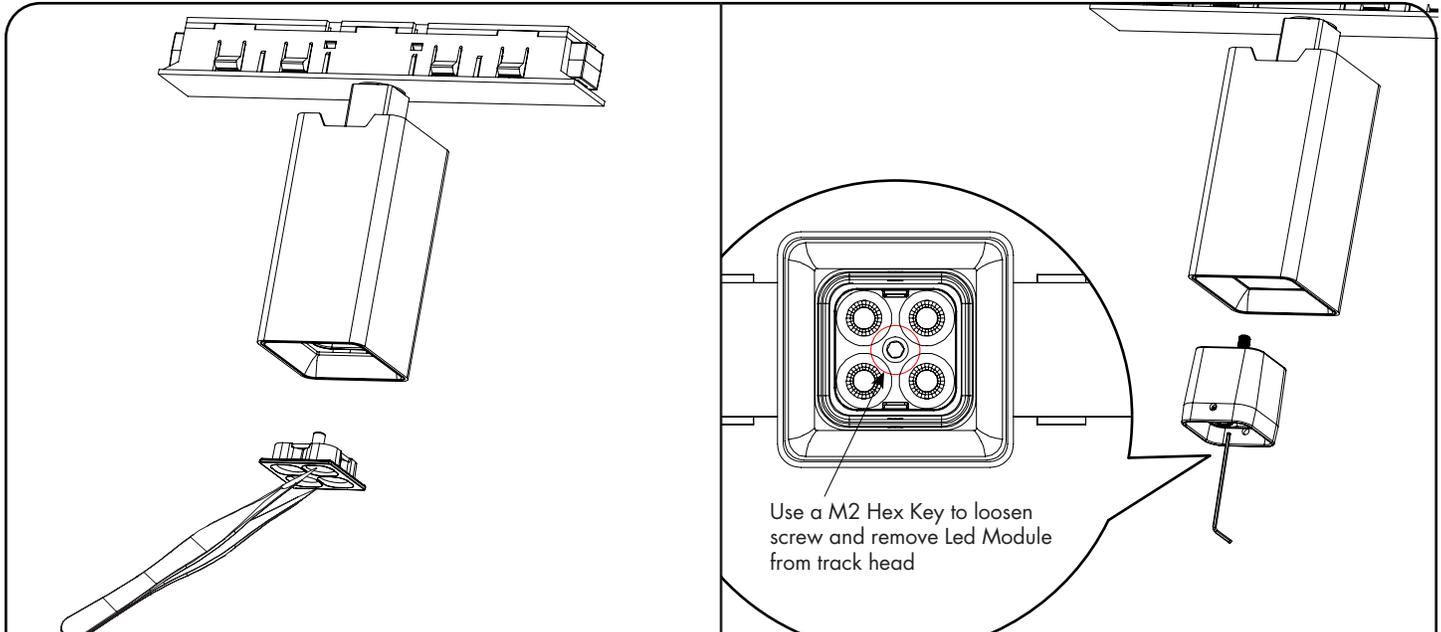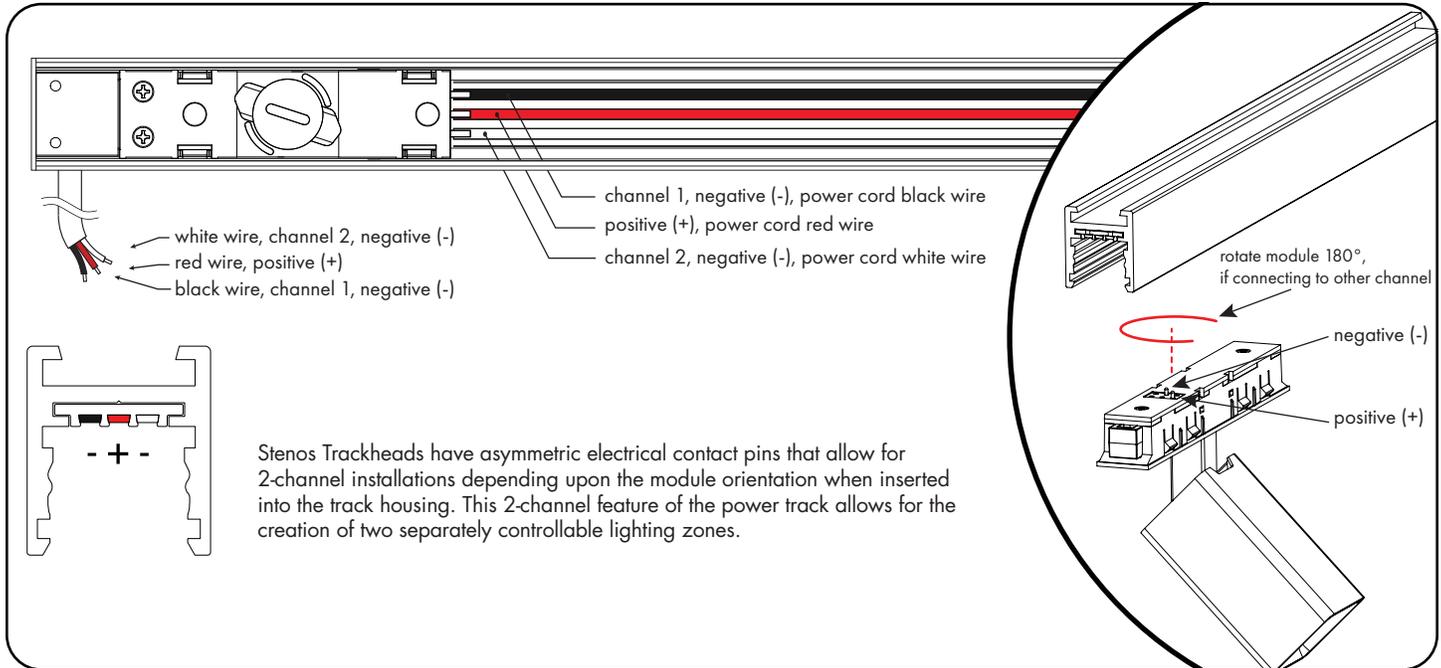

- To change out the louver and secondary optic, remove them using the soft tip tweezers that are supplied with the fixture.
- Once the old optical accessories are removed, a new louver / optic combo can be installed by pushing them into place; the integral magnet will complete the connection once properly seated.
- To remove the LED module from the trackhead body, remove any optic accessories, then loosen the central captive screw using a 2mm Allen hex key. Do not attempt to remove the entire screw as it will remain in the LED module.
- Once screw is fully loosened, gently remove LED module. If module does not fall out freely, gently wiggle the module back and forth to jostle it out of place.
- To install a new LED module, follow these steps in reverse order.